

MM-3M-ST, -F, -EX/MM-4M-F

10 Position Encoder Resolution Data Sheet

Linear Motion: 10mm HT Motor/w 40 TPI Leadscrew

Gearhead Ratio	Max Travel Rate ²		Resolution ¹	
	Inch per second	mm per second	µinch per count	µm per count
16:1	0.5208	13.2292	39.0625	0.992189484379
64:1	0.1302	3.3073	9.765625	0.248047371095
256:1	0.0326	0.8268	2.44140625	0.0620118427737
1024:1	0.0081	0.2067	0.6103515625	0.0155029606934

Travel rate calculations:

- Output Shaft RPM = RPM of motor/Gearhead Ratio
Distance per minute = Output shaft RPM x Lead (0.025 inch, 0.635 mm)
Distance per second = Distance per minute/60
Distance in millimeter = inch/39.37 x 10⁻³
Distance in micrometer = inch/39.37 x 10⁻⁶

Encoder resolution calculations:

- Encoder counts per shaft revolution = 40 encoder counts x Gearhead ratio
Minimum encoder count (inch) = Lead (0.025 inch)/ Encoder counts per output shaft revolution
Minimum encoder count (millimeter) = Minimum encoder count (inch)/39.37 x 10⁻³ in.
Minimum encoder count (micrometer) = Minimum encoder count (inch)/39.37 x 10⁻⁶

Conversion:

- 1 inch (in) = 25.4 mm
1 inch (in) = 25,400 µm
1 millimeter (mm) = 39.37 x 10⁻³ inch
1 micrometer (µm) = 39.37 x 10⁻⁶ inch
1 deg (deg) = 3,600 arc-second
1 arc-sec = 0.277 x 10⁻³ degree

Notes:

- 1) The lead values shown above in both travel rate and resolution calculations are for 40 (1/40) threads per Inch (TPI) leadscrews. For an 80 TPI leadscrew, substitute 0.0125 inch lead.
- 2) Max travel rate calculated with motor armature running at a maximum speed of 20,000 RPM.
- 3) The 10 mm motors used with linear stages incorporate dual channel, 10 position, magnetic encoders. The resultant quadrature output is equal to 40 encoder counts per motor armature revolution.

MTR-10-10E-HT MicroMini™ Motor

Linear 40 TPI Connection Specifications


Motor Type: MTR-10-10E-HT with 16:1 planetary gearhead and magnetic encoder

Connector type: Dual row IDC

***Mate Part # (male pins):**

Pancon Part #057-010-115

Pin #	Name	Pin #	Name
1	Motor+	6	Motor -
2	Encoder+V	7	Limit ground
3	Encoder Ch A	8	No connection
4	Encoder Ch B	9	Reverse limit
5	Ground (case)	10	Forward limit

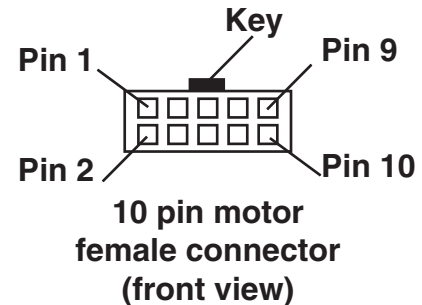

Electrical Specifications:

Supply Voltage Nom. (Volts)	6
Armature Resistance (Ohm) ±12%	10.8
Maximum power output (Watts) ⁽²⁾	0.81
Maximum Efficiency (%) ⁽²⁾	78
No Load Speed (RPM) ±12% ⁽²⁾	13,200
Friction Torque (at no-load speed)(mNm)	0.03
No Load Current (mA) ±50% ⁽³⁾	8
Stall Torque (mNm)	2.34
Velocity Constant (RPM/Volt)	2,231
Back EMF Constant (mV/RPM)	0.448
Torque Constant (mNm/A)	4.28
Armature Inductance (mH)	0.100
Speed/Torque gradient (RPM/mNm)	5,630
Maximum permissible speed (RPM)	12,000
Maximum continuous current (mA)	291
Maximum continuous torque (mNm)	1.21
Maximum power output at nominal voltage (mW)	810
Thermal time constant (s)	5/289

Encoder Specifications:

Supply Voltage	5 VDC Nominal
Max Voltage Supply	15 VDC
Operating Current	5mA Nominal @5 VDC
Signal Phase Shift	90°
Maximum Signal Frequency	7.2 KHz
Temperature Range	-40°C to +85° C
Output Signal Type	Square wave
Signal Rise Time	less than 5µs
Phase Relationship	Ch A leads CH B when motor rotation is clockwise as seen from shaft end.
Pulses per Revolution	12 (2 channels)
Quadrature	48 encoder counts
Output signal CMOS and TTL compatible	

Mechanical Specifications:

Mechanical Time Constant (ms) ⁽²⁾	7
Armature Inertia (g - cm ²)	0.12
Angular Acceleration (x10 ³ rad/sec ²) ⁽²⁾	195
Maximum rotor temperature	+85°C)
Axial Play	0.2mm
Shaft Play (measured at bearing)	
Radial	Less than 0.03mm
Axial	Less than 0.2mm
Thermal Resistance (C°/W)	
Rotor to Case	14
Case to Ambient	41
Maximum Shaft Load (N)	
Radial 1.5mm from flange	0.5 N
Axial @ standstill	20 N
Weight	8.8 g
Planetary Gearhead recommended	
max continuous input speed	5000 RPM

(1) Ratings are presented independent of each other

(2) Specified at nominal supply voltage

(3) Specified with shaft diameter = 0.8mm at no load

*Mating connectors available through National Aperture, Inc.

The information contained in this data sheet is subject to change without notice. Critical dimensions or specifications should be verified with our technical support staff.

National Aperture, Inc. - 16 Northwestern Dr. - Salem, N.H. 03079-4810 - Tel. (800) 360-4598 - (603) 893-7393 - FAX (603) 893-7857 - www.nationalaperture.com/www.naimotion.com